



Client _____ Quantity _____

Project _____ Position _____

ROC 1100

Model: R110/120PCG/P

Cod: MP01015115006

Technical data


Modularity:	On cabinet with doors
Dimension (mm):	1200x1100x870
Total gas power (Kcal/h):	44712
Total gas power (kW):	52
Net volume (m3):	1,148
Packing dimensions (mm):	1300x1300x1300
Gross weight (kg):	212
Burner power 1 (kW):	6
Burner power 2 (kW):	10
Burner power 3 (kW):	10
Burner power 4 (kW):	10
Burner power 5 (kW):	6
Burner power 6 (kW):	10
Gross volume (m3):	2,074

Features

Burners:	Single and double crown cast iron burners with brass burner cap
Grill:	For single burner in cast iron or stainless steel (optional) dishwasher safe
Working top:	Pressed top made of 2 mm thick AISI 304 stainless steel
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Made of AISI 304 stainless steel
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas boiling unit with 6 burners, model on cabinet with doors. Side panels, bottom and back made in stainless steel. Pressed top made in AISI 304 thickness 20/10 designed for flush alignment. Gas supply by safety taps with thermocouple and pilot burner for the automatic ignition of main burner. Radiused corners top, easy to clean, equipped with high thick enamelled cast-iron hobs resistant to acid, alkali and flame. Rapid burners made in cast iron and brass sealed to the top, nr.4 burner 10 kW and nr.2 burner 6 kW. (Available burner powers 3,5 kW, 6 kW, 7,5 kW, 10 kW). Special design knobs to avoid water penetration in the control panel. Presses hinged doors Ergonomic handles. Base completely made in stainless steel. Hinged doors. Ergonomic handle. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 52 kW.

Technical draw

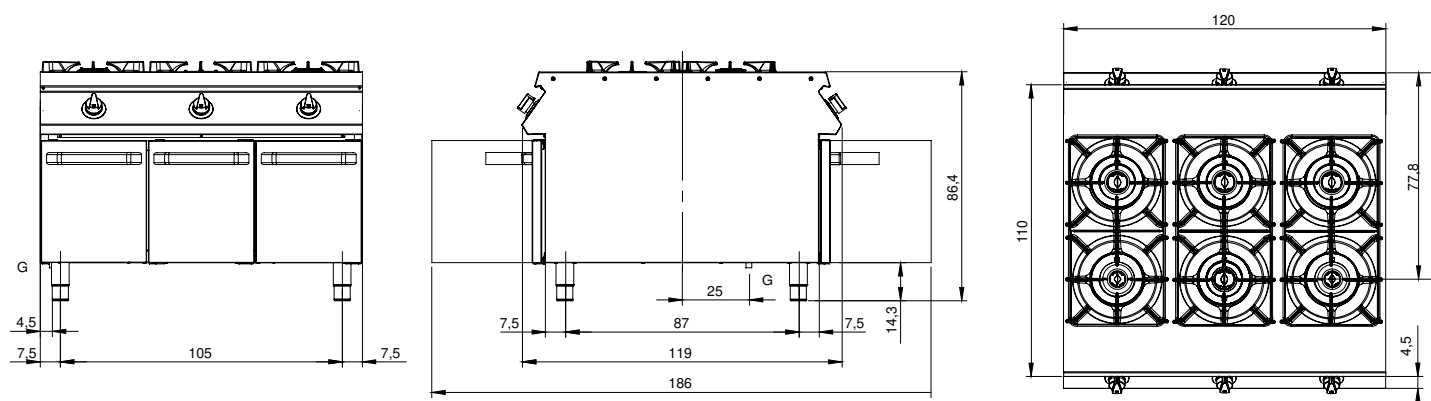

G: Gas connection 1/2"