

Client _____ Quantity _____
Project _____ Position _____



ROC 1100

Model: R110/40PCGB/A

Cod: MP01015115050

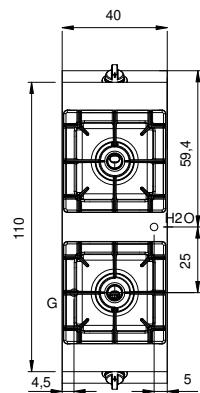
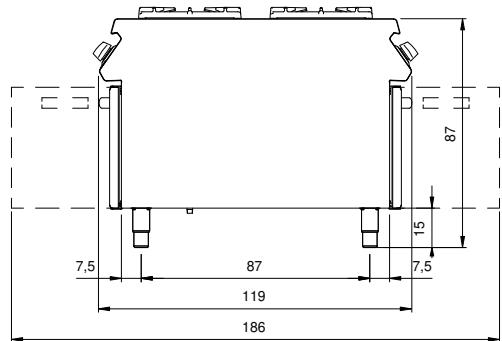
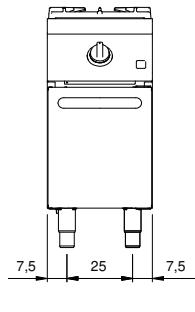
Technical data

| | |
|---------------------------|-----------------------|
| Modularity: | On cabinet with doors |
| Dimension (mm): | 400x1100x870 |
| Total gas power (Kcal/h): | 11178 |
| Total gas power (kW): | 13 |
| Gas connection: | 1/2" |
| Net volume (m3): | 0,383 |
| Packing dimensions (mm): | 480x1272x1240 |
| Gross weight (kg): | 75 |
| Burner power 1 (kW): | 5,5 |
| Burner power 2 (kW): | 7,5 |
| Gross volume (m3): | 0,757 |

Features

| | |
|--------------|---|
| Burners: | Single and double crown cast iron burners with brass burner cap |
| Grill: | For single burner in cast iron or stainless steel (optional) dishwasher safe |
| Working top: | Realizzato in acciaio inox AISI 304 spessore 2 mm con bacinelle in acciaio inox |
| Knobs: | Made of aluminum with IPX5 water protection |
| Flue: | Made of AISI 304 stainless steel |
| Kit Gas: | Natural gas conversion kit 30/50 m/bar (tested with natural gas G20) |

Gas boiling unit with 4 burners model on open cabinet. Side panels, bottom and back made of stainless steel. Top made of AISI 304 thickness 20/10 designed for flush alignment. Gas supply by safety taps with thermocouple and pilot burner for the automatic ignition of main burner. Radioused corners top, easy to clean, equipped with high thick enamelled cast-iron hobs resistant to acid, alkali and flame. Equipped with high-power cast iron/brass rapid burners with containers in stainless steel that can be extracted for easy cleaning. nr.2 burners 7.5 kW and nr.2 burners 5.5 kW. Special design knobs to avoid water penetration in the control panel on both sides. Base completely made of stainless steel. Adjustable feet made of stainless steel. IPX5 protection rating. Gas total power 26 kW.

Technical draw


G: Gas connection 1/2"