



Client _____ Quantity _____
Project _____ Position _____

FUN 650

Model: F65/110CFGB

Cod: MP01032112001

Technical data


Modularity:	Gas oven
Dimension (mm):	1100x650x850
Oven dimension (mm):	555x540x270
Total gas power (Kcal/h):	26484
Total gas power (kW):	30,8
Oven type:	Static oven
Oven power (kW):	5
Oven temperature range (°C):	150-300
Gas connection:	1/2"
Net volume (m3):	0,608
Packing dimensions (mm):	1176x776x1180
Gross weight (kg):	124
Burner power 1 (kW):	5
Burner power 2 (kW):	3,6
Burner power 3 (kW):	5
Burner power 4 (kW):	3,6
Burner power 5 (kW):	5
Burner power 6 (kW):	3,6
Gross volume (m3):	1,077

Features

Burners:	Piezo ignition available in cast iron with single crown brass burner cap
Grill:	In cast iron with long spokes
Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm and removable enamelled containers
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer
Handles:	Brushed aluminum finish
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas range, 6 burners with gas oven Top in AISI 304 stainless steel thickness 8/10; covering in AISI 430 stainless steel 8/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material. (aluminised sheet metal). Hob equipped with 6 burners (3x3.6 kW + 3x5 kW) - total power 25.8 kW. Bowls in enamelled steel that can be extracted for easy cleaning. Pan supports for hobs in acid-resistant enamelled cast iron. Safety gas valve cocks with thermocouple. Piezoelectric burner ignition. Internal oven dimensions 53x54x28h cm. Oven rack dimensions 53x53cm. Double wall thermally insulated oven door. Thermal insulation of oven chamber. Heating takes place by means of a stabilized flame with piezoelectric ignition; the supply of gas takes place by means of a safety thermostatic valve with thermocouple. Temperature adjustment from 150° to 300°C. Piezoelectric ignition of oven burner. Total power 5 kW. Total power 30.8 kW.

Technical draw

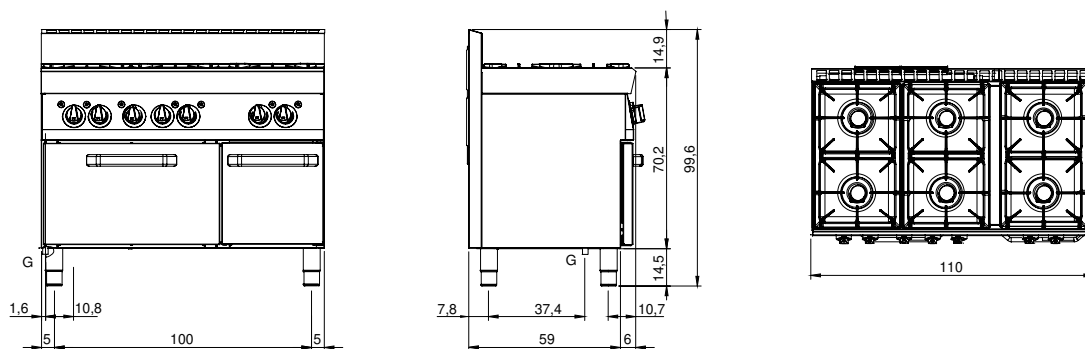

G: Gas connection 1/2"