modular

Client _____ Quantity _____

Project _____ Position _____

FUN 600

Model: F60/60CFE **Cod:** MP01032121000

Technical data

Modularity:	Top
Dimension (mm):	600x600x850
Oven dimension (mm):	390x340x325
Total eletric power (kW):	11
Oven type:	Electric convection oven
Oven power (kW):	3
Oven temperature range (°C):	50-300
Electric power (V):	380-415
Ampere (A):	18,5
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50
Net volume (m3):	0,306
Packing dimensions (mm):	676x695x1170
Gross weight (kg):	64
Gross volume (m3):	0,550

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 8/10 mm
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend
Handles:	Brushed aluminum finish
Flue:	Made in a single piece, which facilitates the alignment of the modules


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Electric range, 4 round plates, electric convection oven

Electric range with electric convection oven. Top with deep funnel in AISI 304 stainless steel; covering in AISI 430 stainless steel thickness 8/10; bottoms and internal parts in anti-corrosion material (aluminised sheet metal). Hob with cast iron electric plates Ø 180 mm with stainless steel edge sealed to top. Six different temperature adjustments for each plate. Indicator lights to show electrical power supplied and plates in operation. Power: 4 plates x 2 kW ea. - Total power of hob: 8 kW. Electric convection oven in enamelled steel with double wall insulated door equipped with balancing springs. The thermally insulated chamber can hold pans in 4 positions. Forced convection operation by means a motor with a stainless steel fan rotor. Heating is by means of a thermostat-controlled heating element with temperature adjustment from 100 to 300°C + 1 grill heating element. The oven is equipped with a main switch, thermostat, indicator lights to show proper operation, chamber illumination light. Usable volume: 50 lt. - Equipped with: 1 rack 445x350 mm. 1 drip pan 445x350x30h. mm. Oven power: 3 kW - Total power 11 kW. Electrical power supply VAC 400+3N 50 Hz.

Technical draw

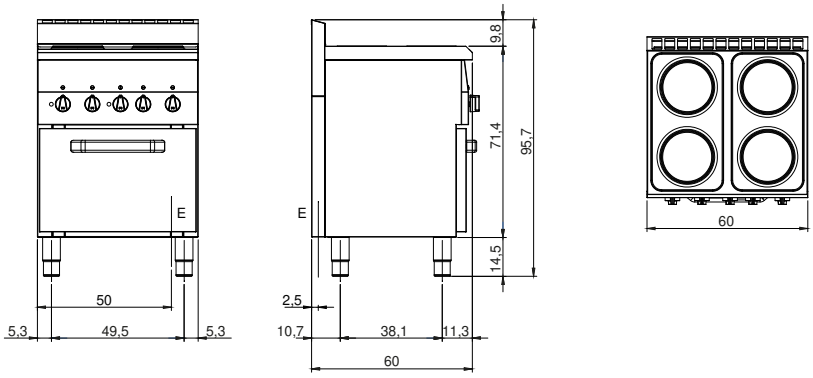

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.