modular

Client _____ Quantity _____

Project _____ Position _____

FUN 700

Model: F70/110CFGEB **Cod:** MP01032133002

Technical data

Modularity:	Electric oven
Dimension (mm):	1100x700x850
Oven dimension (mm):	565x330x325
Total eletric power (kW):	3,96
Total gas power (Kcal/h):	22184
Total gas power (kW):	25,8
Oven type:	Electric convection oven
Oven power (kW):	3,96
Oven temperature range (°C):	50-300
Gas connection:	1/2"
Electric power (V):	380-415
Ampere (A):	6,5
Phases:	3N
Frequency (Hz):	50
Net volume (m3):	0,655
Packing dimensions (mm):	1176x776x1180
Gross weight (kg):	131
Burner power 1 (kW):	5,5
Burner power 2 (kW):	3,7
Burner power 3 (kW):	3,7
Burner power 4 (kW):	3,7
Burner power 5 (kW):	5,5
Burner power 6 (kW):	3,7
Gross volume (m3):	1,077

Features

Burners:	Double or single crown cast iron version available with a pilot light
Grill:	Cast-iron with brass single- and double-crown burner with pilot
Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm and removable enamelled containers
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer
Handles:	Brushed aluminum finish
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Gas range enamelled containers, 6 burners, electric convection oven

Gas range with 6 burners, electric convection oven GN 1/1 and neutral cabinet. Top made of AISI 304 stainless steel thickness 8/10; covering in AISI 304 stainless steel thickness 8/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material (aluminised sheet metal). Equipped with high-power cast iron/brass rapid burners with bowls in enamelled steel that can be extracted for easy cleaning. Gas supplied by means of safety valve cocks with thermocouple and pilot burner for automatic burner lighting. Pan supports for hobs in acid-resistant enamelled cast iron Oven in enamelled steel with double wall isolated door on hinges with balancing springs. The thermally insulated chamber is equipped with 3-position side rack supports which make it possible to insert 3 pans GN 1/1 h. 65 mm. Forced convection operation. Stainless steel fan rotor. - 3 thermostat controlled heating elements with a field of temperature adjustment from 100° to 300°C. The oven is equipped with a main switch, thermostat and indicator lights to show correct operation. Internal dimensions 530x340x325h. Mm. - 1 rack GN 1/1 included. Upper level power (gas) 4 burners x 3.7 Kw and 2 x 5.5 Kw. Total gas power 25.8 Kw Oven power (electric) 3.96 Kw Electrical power supply VAC 400 + 3N 50÷60 Hz. Neutral cabinet equipped with double wall hinged door and chromed steel internal rack holder rack support. Internal dimensions 340x540x390h. - 1 rack GN 1/1 included.

Technical draw

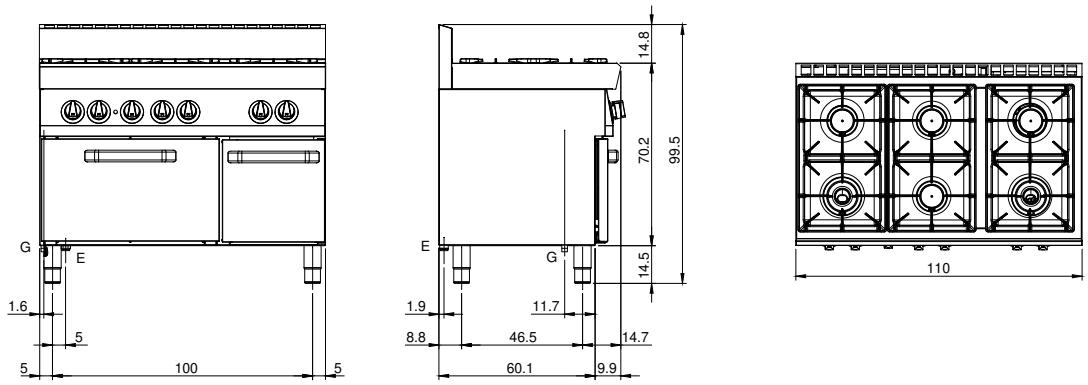

G: Gas connection 1/2"

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.