



Client _____ Quantity _____

Project _____ Position _____

ROC 1100

Model: R110/100CFG

Cod: MP01035115001

Technical data


Modularity:	Gas oven
Dimension (mm):	1000x1100x870
Oven dimension (mm):	540x1015x310
Total gas power (Kcal/h):	39553
Total gas power (kW):	46
Oven type:	Static oven
Oven power (kW):	10
Oven temperature range (°C):	95-300
Net volume (m3):	0,766
Packing dimensions (mm):	1300x1300x1300
Gross weight (kg):	125,4
Burner power 1 (kW):	6
Burner power 2 (kW):	10
Burner power 3 (kW):	10
Burner power 4 (kW):	10
Gross volume (m3):	2,074

Features

Burners:	Single and double crown cast iron burners with brass burner cap
Grill:	For single burner in cast iron or stainless steel (optional) dishwasher safe
Working top:	Pressed top made of 2 mm thick AISI 304 stainless steel
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Made of AISI 304 stainless steel
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas range with 4 burners on gas static oven. Side panels, bottom and back made in stainless steel. Pressed top made in AISI 304 thickness 20/10 designed for flush alignment. Flue made in Stainless steel. Gas supply by safety taps with thermocouple and pilot burner for the automatic ignition of main burner. Radiused corners top, easy to clean, equipped with high thick enamelled cast-iron hobs resistant to acid, alkali and flame. Rapid burners made in cast iron and brass sealed to the top, nr.3 burners 10 kW and nr.1 burner 6 kW. (Available burner powers 3,5 kW, 6 kW, 7,5 kW, 10 kW). Gas oven equipped with thermostatic valve for temperature regulation from 50° C to 300 °C. Oven stabilized burner with piezoelectric ignition equipped with pilot flame and safety thermocouple. Cooking chamber made in stainless steel. Oven inner door made in stainless steel with labyrinth seal. Oven power 10 kW. Special design knobs to avoid water penetration in the control panel. Adjustable feet made in stainless steel. Door with ergonomic handle. IPX5 protection rating. Gas total power 46 kW.

Technical draw

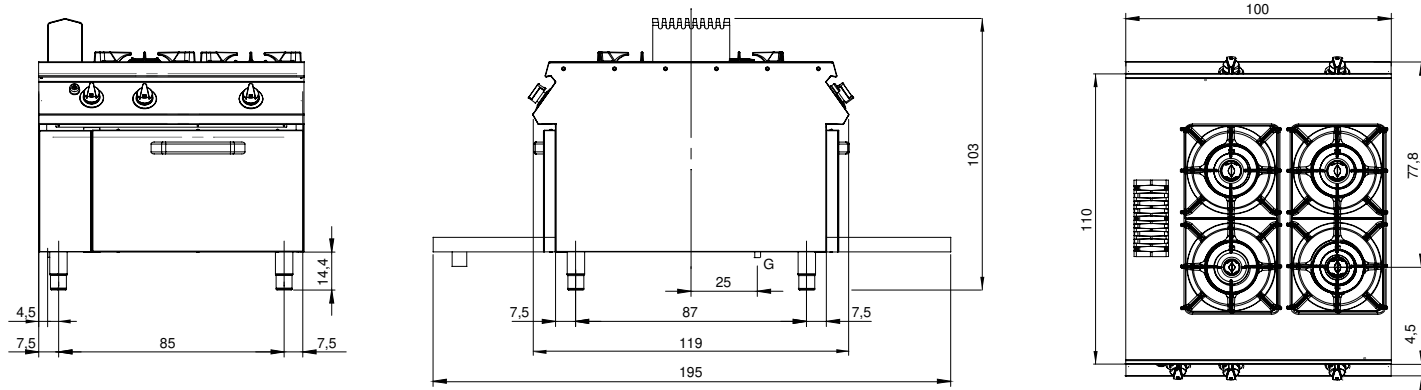

G: Gas connection 1/2"