modular



Client _____ Quantity _____

Project _____ Position _____

ROC 1100

Model: R110/100CFGEB **Cod:** MP01035135050

Technical data

Modularity:	Electric oven
Dimension (mm):	1000x1100x870
Oven dimension (mm):	555x1015x255
Total eletric power (kW):	9
Total gas power (Kcal/h):	22356
Total gas power (kW):	26
Oven type:	Static oven
Oven power (kW):	9
Oven temperature range (°C):	50-300
Gas connection:	1/2"
Electric power (V):	380-415
Ampere (A):	14
Phases:	3N
Cable section (mmq):	5G1,5
Frequency (Hz):	50-60
Net volume (m3):	0,957
Packing dimensions (mm):	1280x1272x1274
Burner power 1 (kW):	5,5
Burner power 2 (kW):	7,5
Burner power 3 (kW):	7,5
Burner power 4 (kW):	5,5
Gross volume (m3):	2,074

Features

Burners:	Single and double crown cast iron burners with brass burner cap
Grill:	For single burner in cast iron or stainless steel (optional) dishwasher safe
Working top:	Realizzato in acciaio inox AISI 304 spessore 2 mm con bacinelle in acciaio inox
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Made of AISI 304 stainless steel
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Gas range enamelled containers, 4 burners, electric static oven

Gas range with 4 burners on electric static oven. Side panels, bottom and back made of stainless steel. Pressed top made of AISI 304 thickness 20/10 designed for flush alignment. Lateral flue made of stainless steel. Gas supply by safety taps with thermocouple and pilot burner for the automatic ignition of main burner. Radioused corners top, easy to clean, equipped with high thick enamelled cast-iron hobs resistent to acid, alkali and flame. Equipped with high-power cast iron/brass rapid burners with containers in stainless steel that can be extracted for easy cleaning. nr.2 burners 7.5 kW and nr.2 burners 5.5 kW. Electric oven GN 2/1. Heating by electric upper and lower heating elements with indipendent regulation. Temperature regulation by thermostat, from 50 °C to 300 °C. Safety thermostat. Lamp on control panel to indicate oven heating activation. Cooking chamber made of stainless steel. Oven inner door made of stainless steel with labyrinth seal. Oven power 9 kW. Special design knobs to avoid water penetration in the control panel on both sides. Adjustable feet made of stainless steel. Door with stainless steel tubular handle. IPX5 protection rating. Gas total power 26 kW. Electric power supply VAC 400 3N 50÷60 Hz - 9 kW.

Technical draw

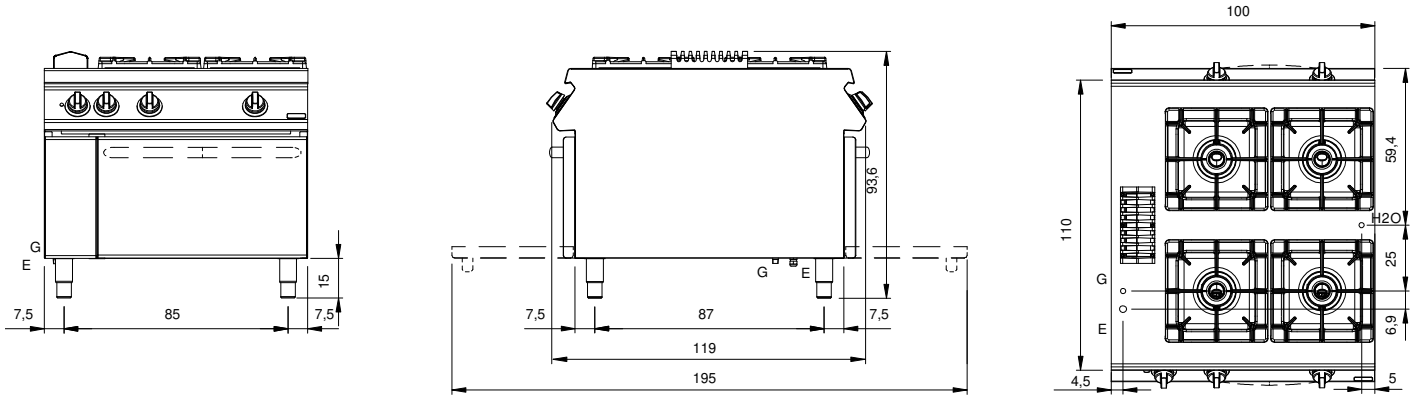

G: Gas connection 1/2"

E: Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.