



Client _____ Quantity _____
Project _____ Position _____

ROC 700

Model: R70/80TPFE

Cod: MP01054123030

Technical data


Modularity:	Electric oven
Dimension (mm):	800x730x870
Oven dimension (mm):	555x660x257
Total electric power (kW):	16
Oven type:	Static oven
Oven power (kW):	6
Oven temperature range (°C):	50-300
Electric power (V):	380-415
Ampere (A):	25
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Drain size:	1"
Net volume (m3):	0,508
Packing dimensions (mm):	880x856x1109
Gross weight (kg):	163,6
Gross volume (m3):	0,835

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Removable gas exhaust flue grill made of cast iron

Electric solid top with 4 zones on electric static oven. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 con invaso per la raccolta dei liquidi e foro di scarico. Rear flue made in enamelled cast-iron; designed for flush alignment. Cooking plate made with high thick steel 16M05. 4 indipendent cooking zones each with 2.5 kW power, marked with a satin cooking surface. Safety thermostats with automatic recovery. Lamp to indicate heating activation and proper working of the equipment. Electric oven GN 2/1. Heating by electric upper and lower heating elements with indipendent regulation. Temperature regulation by thermostat, from 50 °C to 300 °C. Safety thermostat. Lamp on control panel to indicate oven heating activation. Cooking chamber made in stainless steel. Oven inner door made in stainless steel with labyrinth seal. Oven power 6 kW. Special design knobs to avoid water penetration in the control panel. IPX5 protection rating. Adjustable feet made in stainless steel. Electric power supply VAC 400 3N 50÷60 Hz - 16 kW.

Technical draw

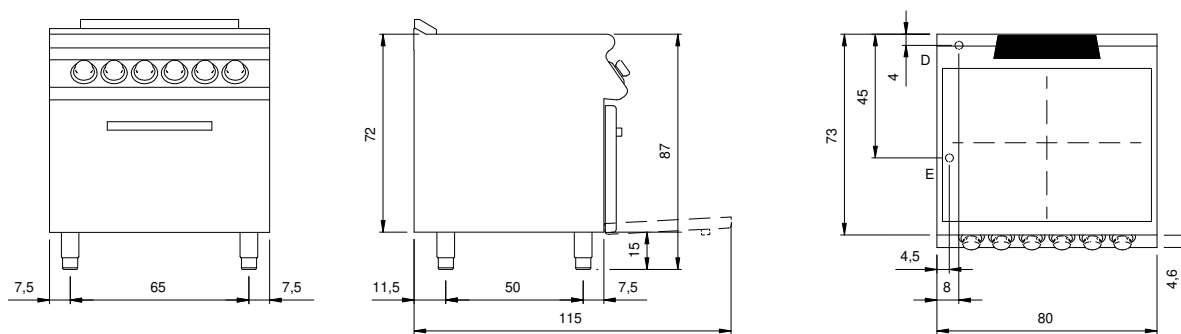

E: Electric power

D: Drain for water