



Client _____ Quantity _____

Project _____ Position _____

ROC 1100

Model: R110/100IND/P

Cod: MP01135125004

Technical data


Modularity:	On cabinet with doors
Dimension (mm):	1000x1100x870
Total electric power (kW):	20
Electric power (V):	380-415
Ampere (A):	30,5
Phases:	3N
Cable section (mmq):	5G6
Frequency (Hz):	50-60
Net volume (m3):	0,957
Packing dimensions (mm):	1280x1272x1274
Gross weight (kg):	140
Gross volume (m3):	2,074

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection
Handles:	The brushed aluminum handles allow for a secure and sturdy grip with a ergonomic lines
Flue:	Made of AISI 304 stainless steel

Induction hob with 4 cooking zones, model on cabinet with doors. Side panels, bottom and back made of stainless steel. Glass ceramic hob sealed to the top. Lateral flue made of stainless steel. Top designed for flush alignment. Heating is activated by the pots detection system when they are in contact with the plate equipped with 4 independent cooking zones each with 5 kW. Cooking zone marked with a screen printed outline on the glass. Lamps on control panel to indicate heating activation and the proper equipment operation designed for flush alignment. Special design knobs to avoid water penetration in the control panel on both sides. Base completely made of stainless steel. Doors with stainless steel tubular handle. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 20 kW.

Technical draw

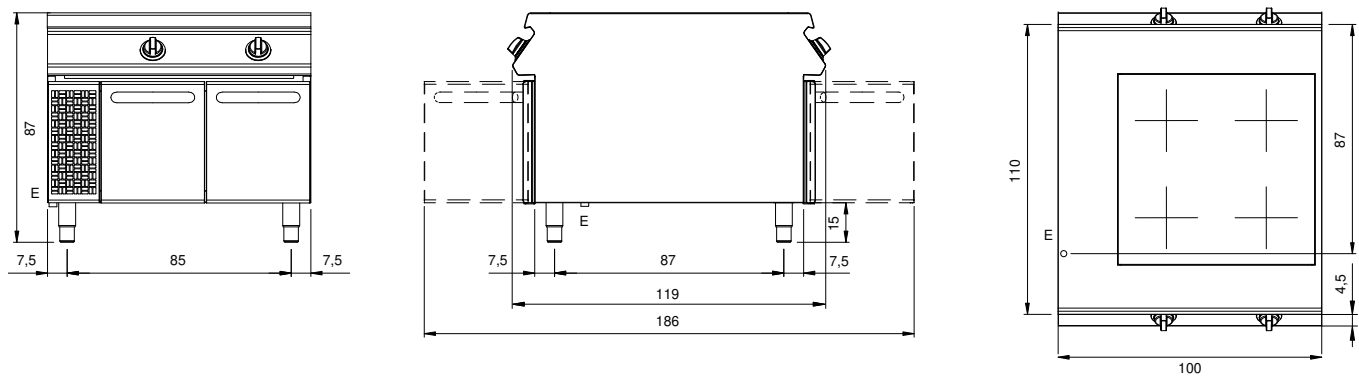

E: Electric power