modular



Client _____ Quantity _____

Project _____ Position _____

## ROC 900

**Model:** R90/40INDW/A **Cod:** MP01174124002

### Technical data

| | |
|---|---|
| **Modularity:** | On open cabinet |
| **Dimension (mm):** | 400x900x870 |
| **Total eletric power (kW):** | 5 |
| **Electric power (V):** | 380-415 |
| **Ampere (A):** | 8 |
| **Phases:** | 3N |
| **Cable section (mmq):** | 5G1,5 |
| **Frequency (Hz):** | 50-60 |
| **Net volume (m3):** | 0,313 |
| **Packing dimensions (mm):** | 480x1026x1075 |
| **Gross weight (kg):** | 48 |
| **Gross volume (m3):** | 0,529 |


### Features

| | |
|---|---|
| **Working top:** | Made of AISI 304 stainless steel with a thickness of 20/10 mm |
| **Knobs:** | Made of aluminum with IPX5 water protection |
| **Flue:** | Removable made of cast iron |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Induction hob with 1 wok cooking zone, model on open counter. Side panels, bottom and back made in stainless steel. Glass ceramic hob sealed to the top. Top designed for flush alignment. Heating is activated by the pot detection system when they are in contact with the wok equipped with 1 cooking zone of 5 kW. Lamps on control panel to indicate heating activation and the proper equipment operation designed for flush alignment. Special design knobs to avoid water penetration in the control panel.Base completely made in stainless steel. Adjustable feet made in stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 5 kW.

## Technical draw

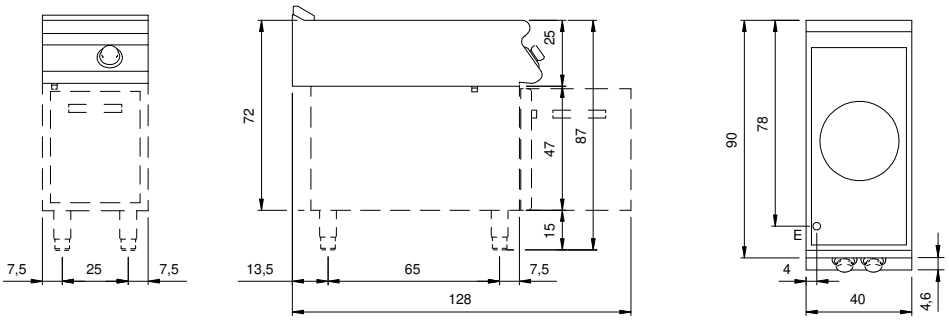


**E:** Electric power

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.