

Client _____ Quantity _____

Project _____ Position _____

FUN 600

Model: F60/30CPE/1V14/T

Cod: MP01212121000



Technical data


Modularity:	Top
Dimension (mm):	300x600x300
Total electric power (kW):	3
Nr. Wells:	1
Well litres 1:	14
Well dimensions 1 (mm):	251x374x185
Electric power (V):	220-240
Ampere (A):	14
Phases:	1
Cable section (mmq):	3G2,5
Frequency (Hz):	50-60
Cold water inflow:	Connessione non presente
Drain size:	1"
Net volume (m3):	0,054
Packing dimensions (mm):	376x695x596
Gross weight (kg):	18
Gross volume (m3):	0,156

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 8/10 mm
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend
Water inflow:	Manual input

The top and the basket supports are made of AISI 304 stainless steel; the tub is made of AISI 316 stainless steel; covering in AISI 430 stainless steel thickness 8/10; bottoms and internal parts in anti-corrosion material (aluminised sheet metal). Cock and safety lever for draining, located on control panel. 4-position switch Shielded heating elements located inside the tub. Indicator light to show electrical power supplied and heating elements in operation. Tub capacity 14 lt. - 1 heating element x 3 kW - Total power 3 kW - Power supply voltage V AC 230+1 50÷60 Hz. Baskets not included.

Technical draw

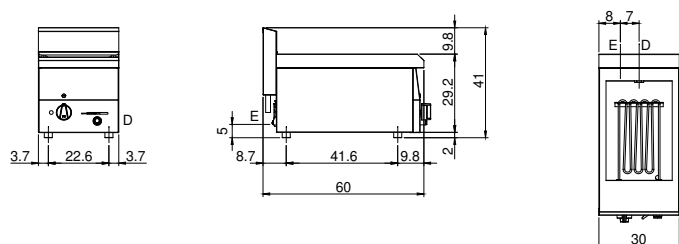

E: Electric power

D: Drain for water