



Client _____ Quantity _____
Project _____ Position _____

ROC 1100

Model: R110/40CPE/1V40

Cod: MP01215125001

Technical data


Modularity:	On cabinet with doors
Dimension (mm):	400x1100x870
Total electric power (kW):	9
Nr. Wells:	1
Well litres 1:	40
Well dimensions 1 (mm):	306x508x242
Electric power (V):	380-415
Ampere (A):	14
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Cold water inflow:	3/4"
Cold water pressure (bar):	Max pressure 5 bar
Drain size:	1"
Net volume (m3):	0,383
Packing dimensions (mm):	480x1272x1240
Gross weight (kg):	68
Gross volume (m3):	0,757

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Knobs:	Made of aluminum with IPX5 water protection
Water inflow:	With tap

Electric pasta cookers with 1 well capacity 40 liters. Side panels, bottom and back made of stainless steel. Pressed top made of AISI 304 thickness 20/10 with overflow control edge designed for flush alignment. Deep drawn well in AISI 316 polished stainless steel with radiused bottom. Water load by means of tap located on the control panel. Water dispenser made of stainless steel located under the drain board. Heating by means of armoured immersion-type heating elements. Heating control by means of energy regulator. Lamp on control panel to indicate heating activation. Safety thermostat with manual reset. Water drain located inside the lower base. Special design knob to avoid water penetration in the control panel. IPX5 protection rating. Adjustable feet made of stainless steel. Baskets not included. Electric power supply VAC 400 3N 50÷60 Hz - 9 kW.

Technical draw

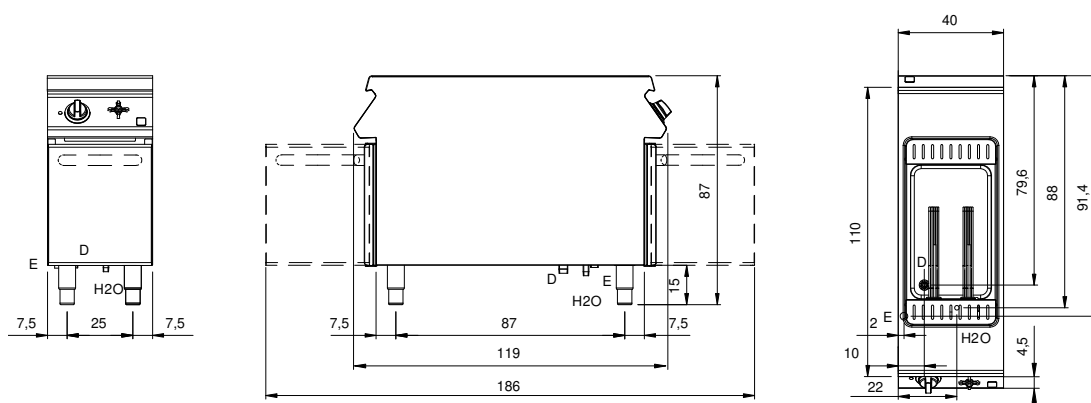

E: Electric power

D: Drain for water

H2O: Water inflow 3/4"