



Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## ROC 900

Model: R90/40BMG/A

Cod: MP01254114001

### Technical data


|                           |                 |
|---------------------------|-----------------|
| Modularity:               | On open cabinet |
| Dimension (mm):           | 400x900x870     |
| Total gas power (Kcal/h): | 2580            |
| Total gas power (kW):     | 3               |
| Nr. Wells:                | 1               |
| Well litres 1:            | 25              |
| Well dimensions 1 (mm):   | 351x685x155     |
| Gas connection:           | 1/2"            |
| Drain size:               | 1"              |
| Net volume (m3):          | 0,313           |
| Packing dimensions (mm):  | 480x1026x1075   |
| Gross weight (kg):        | 50,1            |
| Gross volume (m3):        | 0,529           |

### Features

|               |                                                                      |
|---------------|----------------------------------------------------------------------|
| Working top:  | Made of AISI 304 stainless steel with a thickness of 20/10 mm        |
| Knobs:        | Made of aluminum with IPX5 water protection                          |
| Flue:         | Removable made of cast iron                                          |
| Water inflow: | Manual input                                                         |
| Kit Gas:      | Natural gas conversion kit 30/50 m/bar (tested with natural gas G20) |

Gas bain-marie GN 1/1 + 1/3, model on open cabinet. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 designed for flush alignment. Rear flue made in enamelled cast-iron. Well made in stainless steel AISI 304. Heating by means of steel burner with stabilized flame complete with pilot flame and safety thermocouple. Gas supply by means of safety tap with temperature regulation from 30 °C to 90 °C. Ignition by piezoelectric device. Water drain by means of overflow system and vertical drain. Special design knobs to avoid water penetration in the control panel. Base completely made in stainless steel. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 3 kW.

## Technical draw

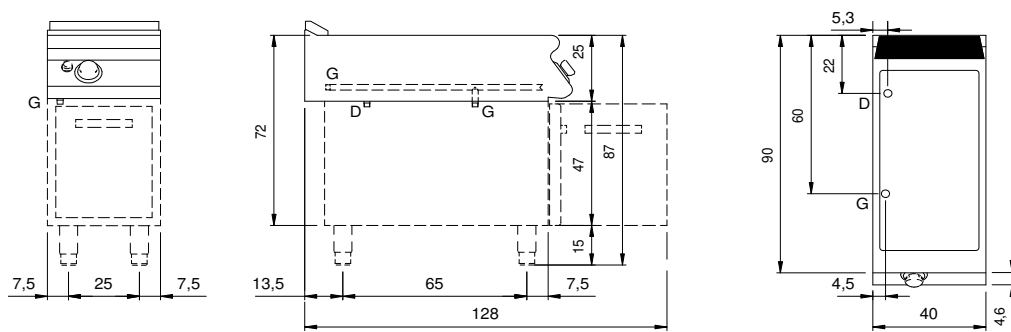

G: Gas connection 1/2"

D: Drain for water