modular



Client _____ Quantity _____

Project _____ Position _____

ROC 900

Model: R90/40BME/T **Cod:** MP01254124000

Technical data

Modularity:	Top
Dimension (mm):	400x900x280
Total eletric power (kW):	2,2
Nr. Wells:	1
Well litres 1:	25
Well dimensions 1 (mm):	351x685x155
Electric power (V):	220-240
Ampere (A):	10
Phases:	1
Cable section (mmq):	3G1,5
Frequency (Hz):	50-60
Drain size:	1"
Net volume (m3):	0,101
Packing dimensions (mm):	480x1026x475
Gross weight (kg):	38,1
Gross volume (m3):	0,234


Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Knobs:	Made of aluminum with IPX5 water protection
Water inflow:	Manual input

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electric bain-marie GN 1/1 + 1/3, counter top model. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10 designed for flush alignment. Well made in stainless steel AISI 304. Heating by means of armoured heating elements located under the well. Temperature control by means of thermostat with regulation from 30 °C to 90 °C. Safety thermostat with manual reset which stop heating in case of water lack in the well. Water drain by means of overflow system and vertical drain. Lamp on control panel to indicate heating activation. Special design knobs to avoid water penetration in the control panel. Adjustable feet. IPX5 protection rating. Electric power supply VAC 230 1N 50÷60 Hz - 2,2 kW.

Technical draw

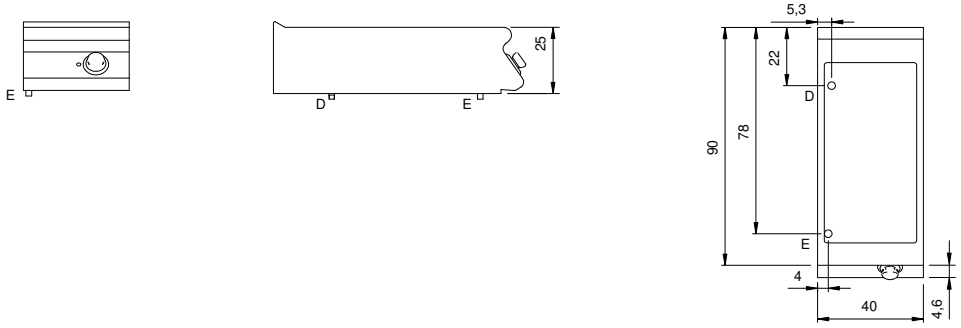

E: Electric power

D: Drain for water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.