



Client _____ Quantity _____

Project _____ Position _____

FUN 700

Model: F70/70FRESE/2V10/T

Cod: MP01292123002

Technical data


Modularity:	Top
Dimension (mm):	700x700x300
Total electric power (kW):	15
Nr. Wells:	2
Well litres 1:	10
Well litres 2:	10
Well dimensions 1 (mm):	244x364x207
Well dimensions 2 (mm):	244x364x207
Electric power (V):	380-415
Ampere (A):	23
Phases:	3N
Cable section (mmq):	5G4
Frequency (Hz):	50-60
Net volume (m3):	0,147
Packing dimensions (mm):	776x776x636
Gross weight (kg):	59
Gross volume (m3):	0,383

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm
Type of heating:	Direct
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer
Heating:	Tilting heating elements for efficient cleaning

Electric fryer model top, eco version. 2 bowls capacity 10 lt top version. Top and bowl in AISI 304 stainless steel; covering in AISI 304 stainless steel thickness 8/10; external reinforcements made of anti-corrosion material (aluminised sheet metal); bottoms and internal parts in AISI 430 steel; flue cover in enamelled steel. Drain valve located in the lower neutral compartment. Equipped with drip tray for collection of residual oil included. Shielded heating elements can be turned over for cleaning, thermostat-controlled in a range of use from 100° to 190°C. Main switch, safety thermostat and indicator light to show correct operation. Vat dimensions: 370x250x210h. mm. Tub capacity 2 x 10 lt. - 2 baskets with handle in thermoplastic material, 2 vat cover and 2 vat filter included. Total power 15 kW
Electrical power supply VAC 400 + 3N 50 Hz.

Technical draw

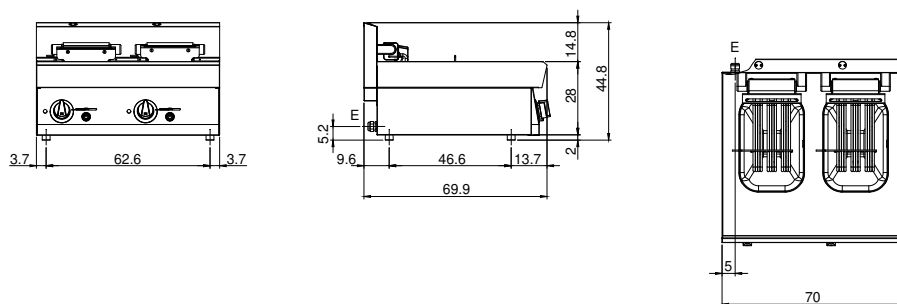

E: Electric power