



Client _____ Quantity _____
Project _____ Position _____

ROC 900

Model: R90/40FRGL/1V21/P

Cod: MP01294114054

Technical data


Modularity:	On cabinet with door
Dimension (mm):	400x900x870
Total electric power (kW):	0,1
Total gas power (Kcal/h):	16338
Total gas power (kW):	19
Nr. Wells:	1
Well litres 1:	21
Well dimensions 1 (mm):	310x440x250
Gas connection:	1/2"
Electric power (V):	220-240
Ampere (A):	0,5
Phases:	1
Cable section (mmq):	3G1
Frequency (Hz):	50
Net volume (m3):	0,313
Packing dimensions (mm):	480x1026x1240
Gross weight (kg):	76,1
Gross volume (m3):	0,611

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 20/10 mm
Type of heating:	Indirect
Knobs:	Made of aluminum with IPX5 water protection
Flue:	Removable made of cast iron
Heating:	Free well
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas fryer 1 free well 21 liters, model on cabinet with door. Side panels, bottom and back made in stainless steel. Top made in AISI 304 thickness 20/10. Rear flue made in enamelled cast-iron. designed for flush alignment. Deep pressed well made in stainless steel AISI 304 with radiused edges with front expansion zone for oil collection and cold zone for food particles collection. Heating by means of high efficiency stainless steel burners located outside the well. Heating regulation by means of safety valve with thermocouple. Ignition by electronic device with continuous sparks release, activated by an integrated button in the gas valve control. Oil temperature controlled by mechanical thermostat. Safety thermostat with manual reset. Equipped with 2 baskets with thermoplastic handle. Lamp on control panel to indicate heating activation. Special design knobs to avoid water penetration in the control panel. Adjustable feet made in stainless steel. IPX5 protection rating. Gas total power 19 kW. Electric power supply VAC 230 1N 50÷60 Hz - 0,1 kW.

Technical draw

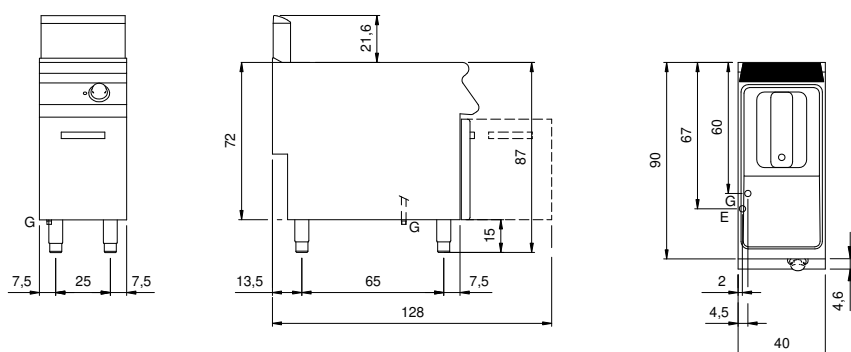

G: Gas connection 1/2"

E: Electric power