



Client _____ Quantity _____
Project _____ Position _____

ROC 1100

Model: R110/80FRER/2V21/P

Cod: MP01295125007

Technical data


Modularity:	On cabinet with doors
Dimension (mm):	800x1100x870
Total electric power (kW):	40
Nr. Wells:	2
Well litres 1:	21
Well litres 2:	21
Well dimensions 1 (mm):	310x444x255
Well dimensions 2 (mm):	310x444x255
Electric power (V):	380-415
Ampere (A):	61
Phases:	3N
Cable section (mmq):	5G16
Frequency (Hz):	50-60
Net volume (m3):	0,766
Packing dimensions (mm):	880x1272x1274
Gross weight (kg):	128
Gross volume (m3):	1,426

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Type of heating:	Direct
Knobs:	Made of aluminum with IPX5 water protection
Heating:	Rotating heating elements

Electric fryer 2 wells 21+21 liters, model on cabinet with doors. Side panels, bottom and back made of stainless steel. Top made of AISI 304 thickness 20/10. Designed for flush alignment. Deep pressed wells made of stainless steel AISI 304 with radiused edges with front expansion zone for oil collection and cold zone for food particles collection. Equipped with drain valve located in the lower neutral compartment. Shielded heating elements can be turned over for cleaning, thermostat-controlled in a range of use from 100° to 190°C. Equipped with main switch and safety thermostat. Lamp on control panel to indicate heating activation. With 1 basket 1/1 and 2 basket 1/2 made of chrome plated steel and plastic handle. Special design knobs to avoid water penetration in the control panel. Adjustable feet made of stainless steel. IPX5 protection rating. Electric power supply VAC 400 3N 50÷60 Hz - 40 kW

Technical draw

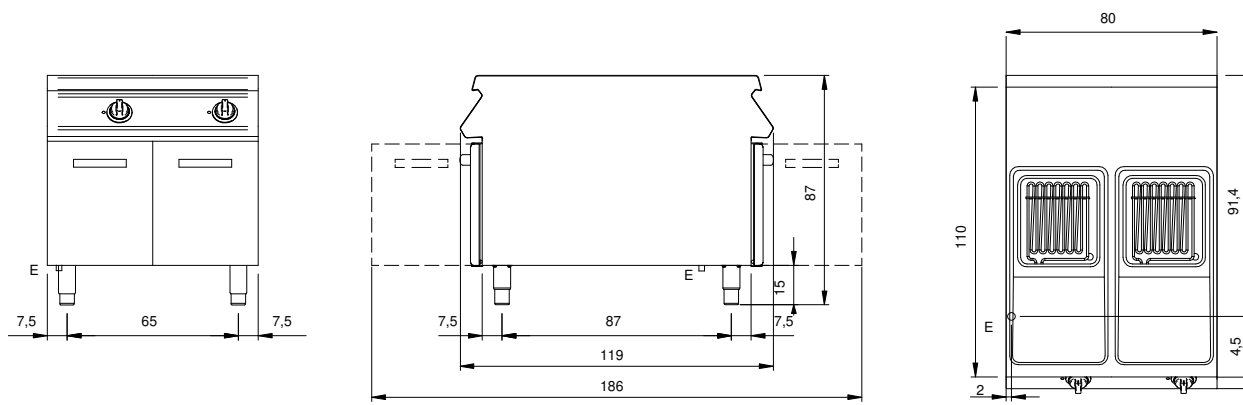

E: Electric power