

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## FUN 700

Model: F70/40SPE/T

Cod: MP01332123000



### Technical data


|                            |             |
|----------------------------|-------------|
| Modularity:                | Top         |
| Dimension (mm):            | 400x700x300 |
| Total electric power (kW): | 1           |
| Nr. Wells:                 | 1           |
| Well litres 1:             | 25,5        |
| Well dimensions 1 (mm):    | 325x530x150 |
| Electric power (V):        | 220-240     |
| Ampere (A):                | 5           |
| Phases:                    | 1           |
| Cable section (mmq):       | 3G1         |
| Frequency (Hz):            | 50-60       |
| Net volume (m3):           | 0,084       |
| Packing dimensions (mm):   | 477x776x612 |
| Gross weight (kg):         | 25          |
| Gross volume (m3):         | 0,227       |

### Features

|              |                                                                                                            |
|--------------|------------------------------------------------------------------------------------------------------------|
| Working top: | Made of AISI 304 stainless steel with a thickness of 10/10 mm                                              |
| Knobs:       | Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer |
| Heating:     | Infrared ceramic heating elements                                                                          |

Heated chip dump top version, bowl GN 1/1, removable bowl GN 1/1 h. 150 mm. and false bottom realized in AISI 304 stainless steel. covering in AISI 304 stainless steel thickness 8/10; external reinforcements in anti-corrosion material (aluminised sheet metal); bottoms and internal parts in AISI 430 steel. Food is heated by an infrared ceramic heating element. Equipped with main switch and indicator light to show correct operation. - 1 heating element x 1 kW. Electrical power supply VAC 230+1 50÷60 Hz.

## Technical draw

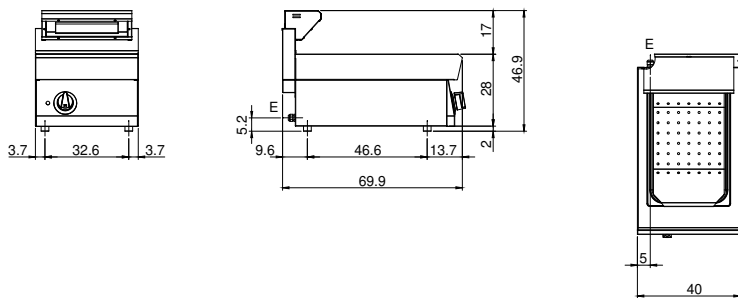

E: Electric power