

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## FUN 650

Model: F65/40FTE/L/T  
Market: Extra UE

Cod: MP01372122000



### Technical data


|                                     |             |
|-------------------------------------|-------------|
| Modularity:                         | Top         |
| Dimension (mm):                     | 400x650x300 |
| Total electric power (kW):          | 4,5         |
| Cooking zone dimensions 1 (LxD mm): | 396x520     |
| Electric power (V):                 | 380-415     |
| Ampere (A):                         | 7           |
| Phases:                             | 3N          |
| Cable section (mmq):                | 5G1,5       |
| Frequency (Hz):                     | 50-60       |
| Net volume (m3):                    | 0,078       |
| Packing dimensions (mm):            | 477x776x612 |
| Gross weight (kg):                  | 38          |
| Gross volume (m3):                  | 0,227       |

### Features

|                              |                                                                                                            |
|------------------------------|------------------------------------------------------------------------------------------------------------|
| Working top:                 | Made of AISI 304 stainless steel with a thickness of 10/10 mm                                              |
| Material of plate:           | Mild steel                                                                                                 |
| Plate finish:                | Smooth                                                                                                     |
| Knobs:                       | Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer |
| Liquid collection container: | Removable and dishwasher safe                                                                              |
| Plate:                       | In mild steel                                                                                              |
| Upright Splash guard:        | On two sides                                                                                               |

Electric griddle with smooth plate. Top in AISI 304 stainless steel thickness 8/10; covering in AISI 430 stainless steel 8/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material. (aluminised sheet metal). Cooking hotplate in steel with high thermal conductivity for even temperature distribution. Provided with front groove, extractable drawer for grease collection and splash guard on three sides. The cooking zone is provided with 3 shielded heating elements (1.5 kW ea.) which are controlled by a thermostat with a range of use from 50° to 300° C - Equipped with safety thermostat and indicator light to show proper operation - Plate dimensions 395x520 mm - Total power 4.5 kW. Electrical power supply V AC 400+3N 50÷60 Hz.

## Technical draw

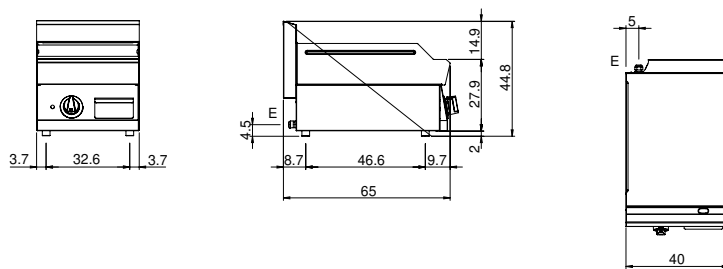

E: Electric power