

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

## FUN 700

Model: F70/40FTE/CL/T

Cod: MP01372123002



### Technical data


|                                     |             |
|-------------------------------------|-------------|
| Modularity:                         | Top         |
| Dimension (mm):                     | 400x700x300 |
| Total electric power (kW):          | 4,5         |
| Cooking zone dimensions 1 (LxD mm): | 396x520     |
| Electric power (V):                 | 380-415     |
| Ampere (A):                         | 7           |
| Phases:                             | 3N          |
| Cable section (mmq):                | 5G1,5       |
| Frequency (Hz):                     | 50-60       |
| Net volume (m3):                    | 0,084       |
| Packing dimensions (mm):            | 477x776x612 |
| Gross weight (kg):                  | 51          |
| Gross volume (m3):                  | 0,227       |

### Features

|                    |                                                                                                            |
|--------------------|------------------------------------------------------------------------------------------------------------|
| Working top:       | Made of AISI 304 stainless steel with a thickness of 10/10 mm                                              |
| Material of plate: | Polished chrome                                                                                            |
| Plate finish:      | Smooth                                                                                                     |
| Knobs:             | Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer |
| Plate:             | Polished chromed plate                                                                                     |

Gas griddle with polished chromed smooth plate on cabinet with door. Top made of AISI 304 stainless steel thickness 8/10; covering in AISI 304 stainless steel thickness 8/10; external reinforcements made of anti-corrosion material (aluminised sheet metal); bottoms and internal parts in AISI 430 steel; flue cover in enamelled steel. Chromed steel plate with high thermal conductivity for even temperature distribution. Provided with front groove, extractable drawer for grease collection and splash guard on three sides. Equipped with steel burner with pilot burner with piezoelectric ignition. Gas supplied by means of thermostatic safety valve with thermocouple. - 1 burner x 5.7 kW. Plate dimensions 395x550 mm. Set up on open cabinet.

## Technical draw

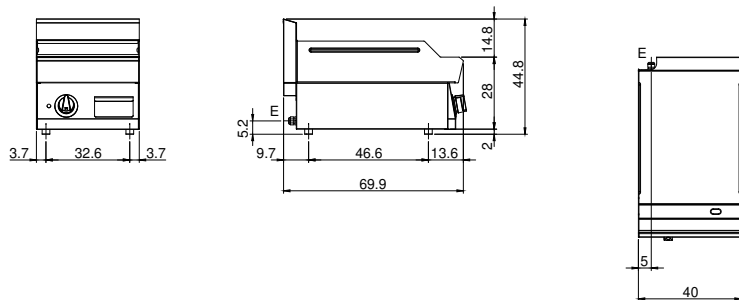

E: Electric power