modular

Client _____ Quantity _____

Project _____ Position _____

## ROC 900

**Model:** R90/80PGD/150 **Cod:** MP01534114003




In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

# Gas boiling pan direct-heated, 150 liters

Gas boiling pan with direct heating capacity 150 liters. Side panels, bottom and back made in stainless steel. Pressed top made in AISI 304 thickness 20/10 equipped with control edge. Designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking weel walls in stainless steel AISI 304 and bottom in AISI 316. Balanced lid in stainless steel AISI 304 equipped with athermic handle. Structure made in stainless steel. Thermal insulation obtained by means of high thickness panels Water charge (hot and cold) by means of electro-valve. Well drain hole with extractable filter. 2" front drain tap made in chromed brass with insulated handle. Heating by means of high efficiency tubular burners in stainless steel. Cooking temperature controlled by safety tap equipped with termocouple and pilot burner. Ignition by piezoelectric device. Special design knob to avoid water penetration in the control panel. Adjustable feet made in stainless steel. Gas total power 24 kW. Electric supply VAC 230 1N 50 Hz- 0.3 kW

## Technical draw

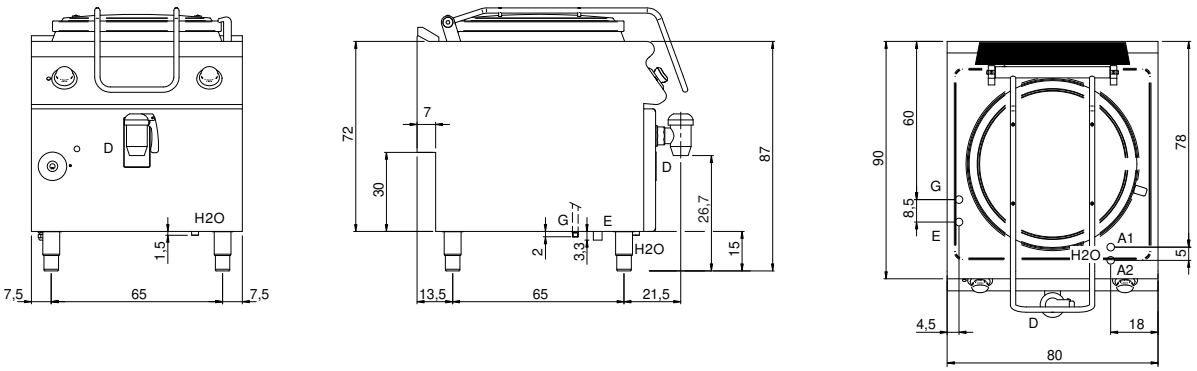


| | | | | | |
|---|---|---|---|---|---|
| **G:** | Gas connection 1/2" | **E:** | Electric power | **H2O:** | Water inflow 3/4" |
| **A1:** | Hot water inflow | **A2:** | Cold water inflow | **D:** | Drain for water |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.