

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_

**ROC 900**

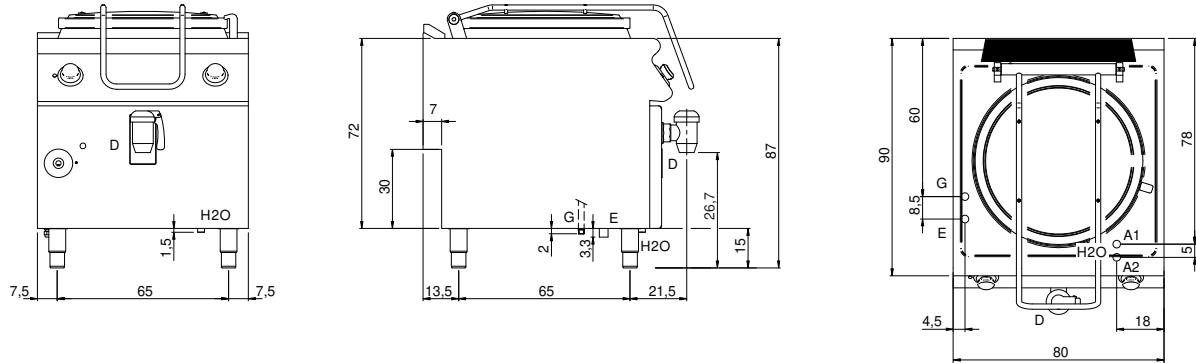
**Model: R90/80PGD/150**

**Cod: MP01534114003**



In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.

Gas boiling pan with direct heating capacity 150 liters. Side panels, bottom and back made in stainless steel. Pressed top made in AISI 304 thickness 20/10 equipped with control edge. Designed for flush alignment. Rear flue made in enamelled cast-iron. Cooking well walls in stainless steel AISI 304 and bottom in AISI 316. Balanced lid in stainless steel AISI 304 equipped with athermic handle. Structure made in stainless steel. Thermal insulation obtained by means of high thickness panels. Water charge (hot and cold) by means of electro-valve. Well drain hole with extractable filter. 2" front drain tap made in chromed brass with insulated handle. Heating by means of high efficiency tubular burners in stainless steel. Cooking temperature controlled by safety tap equipped with thermocouple and pilot burner. Ignition by piezoelectric device. Special design knob to avoid water penetration in the control panel. Adjustable feet made in stainless steel. Gas total power 24 kW. Electric supply VAC 230 1N 50 Hz- 0.3 kW

**Technical draw**


G: Gas connection 1/2"

E: Electric power

H2O: Water inflow 3/4"

A1: Hot water inflow

A2: Cold water inflow

D: Drain for water