modular



Client _____ Quantity _____

Project _____ Position _____

FUN 700

Model: F70/70TPPFGFB **Cod:** MP01052113005

Technical data

Modularity:	Gas oven
Dimension (mm):	700x700x850
Oven dimension (mm):	555x540x270
Total gas power (Kcal/h):	17369
Total gas power (kW):	20,2
Whole-plate power gas (kW):	5,5
Oven type:	Static oven
Oven power (kW):	5
Oven temperature range (°C):	150-300
Gas connection:	1/2"
Net volume (m3):	0,417
Packing dimensions (mm):	776x776x1180
Gross weight (kg):	103
Burner power 1 (kW):	5,5
Burner power 2 (kW):	3,7
Gross volume (m3):	0,711

Features

Grill:	Cast-iron with brass single- and double-crown burner with pilot
Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer
Handles:	Brushed aluminum finish
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)


In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

modular

Gas solid top, 2 burners enamelled containers, gas oven

Gas solid top range with 2 gas boiling unit on gas oven and neutral cabinet Top in AISI 304 stainless steel thickness 8/10; covering in AISI 304 stainless steel thickness 8/10; bottoms and internal parts in AISI 430 steel; internal reinforcements made of anti-corrosion material (aluminised sheet metal). Full plate in steel featuring high-performance differentiated thermal zones and equipped with extractable central ring. Heating takes place by means of the high-power cast iron central burner, with piezoelectric ignition pilot burner. Gas is supplied by means of a thermocouple safety valve. Hob with two high-power cast iron/brass rapid burners with pilot burner for automatic ignition. Gas is supplied by means of a safety valve with thermocouple. The enamelled steel bowl can easily be extracted for cleaning. The hob pan support is made of anti-acid enamelled cast iron. - 1 burner x 3.7 kW and 1 burner x 5.5 kW. Static gas oven in enamelled steel with double wall isolated door on hinges with balancing springs. The thermally insulated chamber is equipped with 3-position side rack supports which can be extracted for cleaning. Heating takes place by means of stabilized flame burner with piezoelectric ignition; gas is supplied by means of a thermostatic safety valve with thermocouple. Temperature adjustment from 150° to 300°C. Internal dimensions 530x540x280h. mm. - 1 rack 530x530 mm included. Full plate 1 burner 5.5 kW. Gas hob 2 burners 1 burner x 3.7 kW and 1 x 5.5 kW. Total gas power 19.7 kW

Technical draw

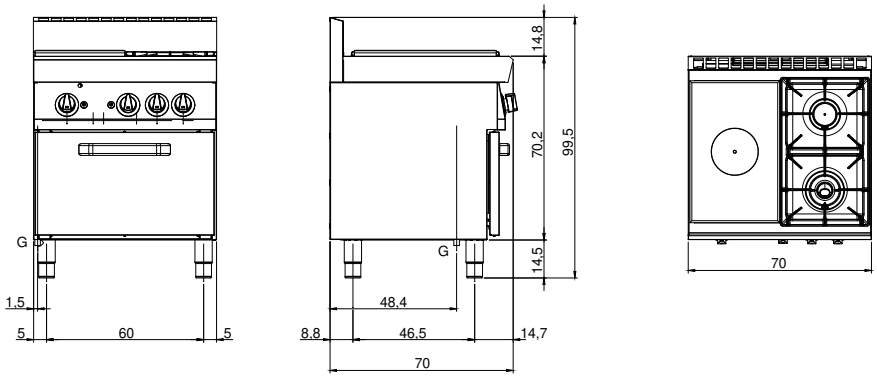

G: Gas connection 1/2"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.