



Client _____ Quantity _____

Project _____ Position _____

FUN 700

Model: F70/70FRGV/2V13/P

Cod: MP01292113000

Technical data


Modularity:	On cabinet with door
Dimension (mm):	700x700x850
Total gas power (Kcal/h):	18917
Total gas power (kW):	22
Nr. Wells:	2
Well litres 1:	13
Well litres 2:	13
Well dimensions 1 (mm):	240x342x343
Well dimensions 2 (mm):	240x342x343
Gas connection:	1/2"
Net volume (m3):	0,417
Packing dimensions (mm):	776x776x1180
Gross weight (kg):	82
Gross volume (m3):	0,711

Features

Working top:	Made of AISI 304 stainless steel with a thickness of 10/10 mm
Type of heating:	Direct
Knobs:	Knobs are made from a sturdy heat-resistant polymer blend and are equipped with liquid anti-leakage washer
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas fryer, 2 vats capacity 13+13 lt. Set up on closed cabinet. Top and tubs in AISI 304 stainless steel; covering in AISI 304 stainless steel thickness 8/10; external reinforcements made of anti-corrosion material (aluminised sheet metal); bottoms and internal parts in AISI 430 steel; flue cover in enamelled steel. Drain valve located in the lower neutral compartment. Equipped with drip tray for collection of residual oil included. Oil heated with steel horizontal flame burners with piezoelectric ignition pilot burner. Gas is supplied by means of a thermostatic safety valve with thermocouple. Safety thermostat. Vat capacity 13+13 lt. Vat dimensions: 280x330x320h. mm. - 1 basket 1/1 with thermoplastic handle, 1 vat cover and 1 vat filter included for each vat Total power 22kW

Technical draw

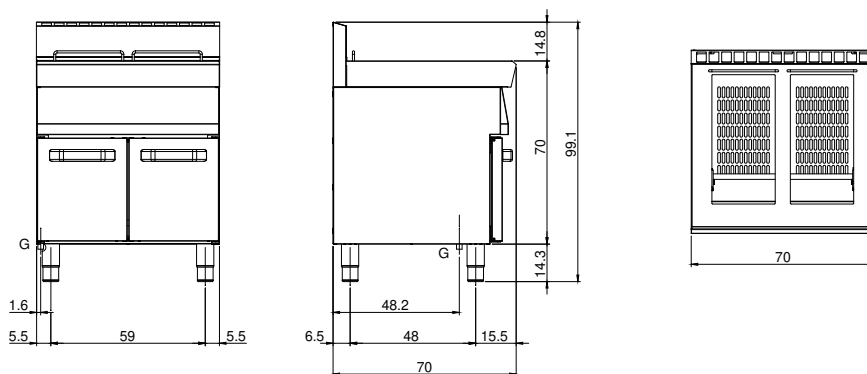

G: Gas connection 1/2"