



Client _____ Quantity _____
Project _____ Position _____

ROC 1100

Model: R110/80FRGV/2V13/P

Cod: MP01295115002

Technical data


Modularity:	On cabinet with doors
Dimension (mm):	800x1100x870
Total gas power (Kcal/h):	20637
Total gas power (kW):	24
Nr. Wells:	2
Well litres 1:	13
Well litres 2:	13
Well dimensions 1 (mm):	240x342x318
Well dimensions 2 (mm):	240x342x318
Gas connection:	1/2"
Net volume (m3):	0,766
Packing dimensions (mm):	880x1272x1274
Gross weight (kg):	114
Gross volume (m3):	1,426

Features

Burners:	In the well
Working top:	Made of AISI 304 stainless steel with a thickness of 2 mm
Type of heating:	Direct
Knobs:	Made of aluminum with IPX5 water protection
Kit Gas:	Natural gas conversion kit 30/50 m/bar (tested with natural gas G20)

Gas fryer with 1 wells 13+13 liters, model on cabinet with doors. Side panels, bottom and back made of stainless steel. Top made of AISI 304 thickness 20/10 designed for flush alignment. Rear flue made of stainless steel. Deep pressed wells with front expansion zone for oil collection and cold zone for food particles collection. Heating by means of high efficiency stainless steel burners located inside the well. Ignition by means of piezoelectric device. Safety thermostat with manual reset. Equipped with 1 basket 1/1 and 2 basket 1/2 made of chrome plated steel and plastic handle. Doors with stainless steel tubular handle. Adjustable feet made of stainless steel. IPX5 protection rating. Gas total power 24 kW.

Technical draw

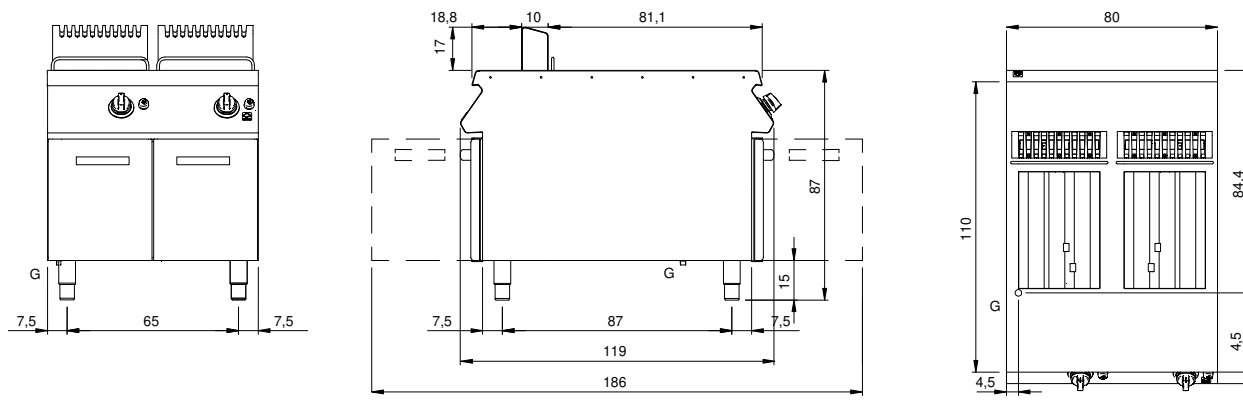

G: Gas connection 1/2"